

- FLAME RETARDANT
ETNAK SHEATH
- SUPERB CAPILLARY
ACTION
- ZERO VOLTAGE LOSS

SOLDER SHRINK (SSK)

4 PROCEDURES IN 1 ACTION

TECHNICAL

External wall	: radiation cross-linked modified polyolefin.
Solder rings	: 2 rings Cd 18, Sn 51, pb 32% with activated flux.
Sealing rings	: thermally stabilized thermoplastic.
Voltage loss	: < 0.002 V
Connection resistance	: < 0.004 Ω
Insulation resistance	: > $10^9 \Omega$
Installation temperature	: 180°C
Temperature resistance	: - 60°C to + 130 °C
Breakdown voltage	: > 600 V

Fig. 1


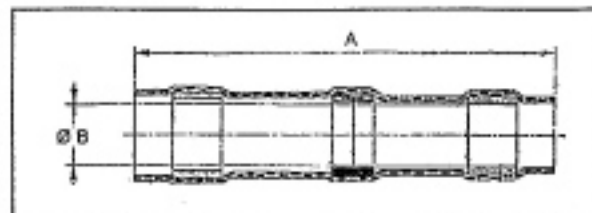


Fig. 2

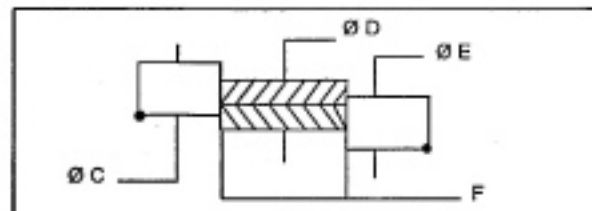

SIZES

	A maxi	A mini	Ø B mini	Ø C maxi	Ø D maxi	Ø D mini	Ø E maxi	F
Transparent	21	25	1,8	1,8	1,8	1	1,8	4 to 8
Red	31	26	2,2	2,2	2,2	1,5	2,2	10 to 12
Blue	36	30	4,2	4,2	4,2	2	4,2	10 to 13
Yellow	42	36	6,7	6,7	6,7	3,4	6,7	10 to 14